


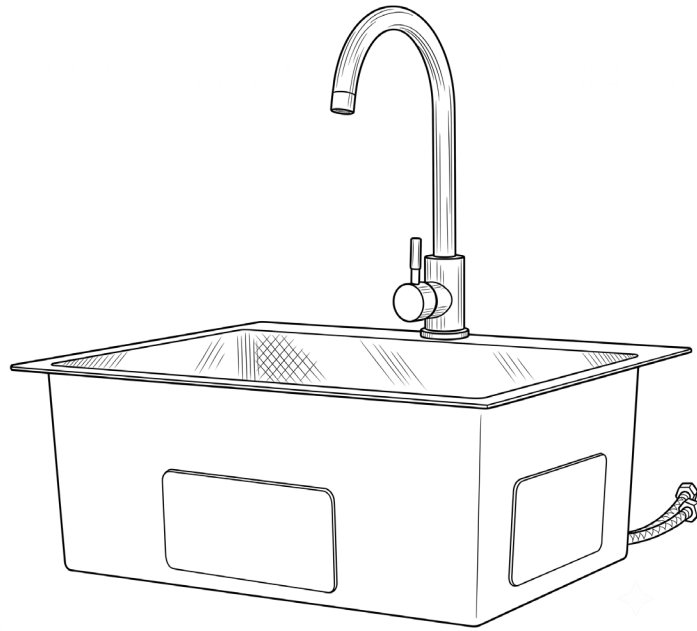

SINK ASSEMBLY

To install your VidelUSA sink, follow this guide.

BEFORE YOU BEGIN



- Verify all components are present and undamaged
- Confirm countertop dimensions match sink specifications
- The water supply should be shut **OFF** during the installation.
- Installation should be performed by a qualified professional.
- For outdoor installations, protect plumbing from freezing temperatures and provide appropriate drainage or winterization as required.

REQUIRED TOOLS

- | | |
|----------------------|-------------------|
| • Adjustable wrench | • Towel or Cloth |
| • Needle-nose pliers | • Plumber's putty |


FACET ASSEMBLY

1. Remove all faucet components from the packaging.
2. Place the facet trim onto the faucet base.
3. Feed the waterline hoses through the faucet mounting hole in the sink, then attach the first rubber O ring.
4. Position the faucet on the sink deck, threading the waterline hoses into the base of the facet. (**Fig 1**)
5. From beneath the sink, install the facet fitting, and secondary rubber O ring.
6. Align the faucet in the desired position and tighten securely.
7. Confirm the faucet is properly oriented and firmly attached.

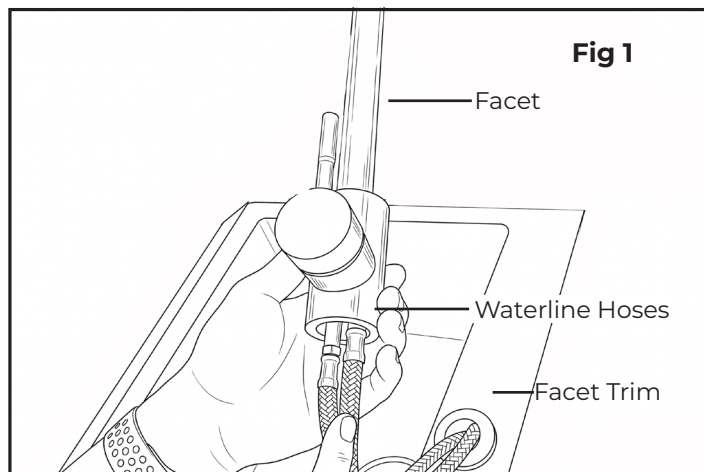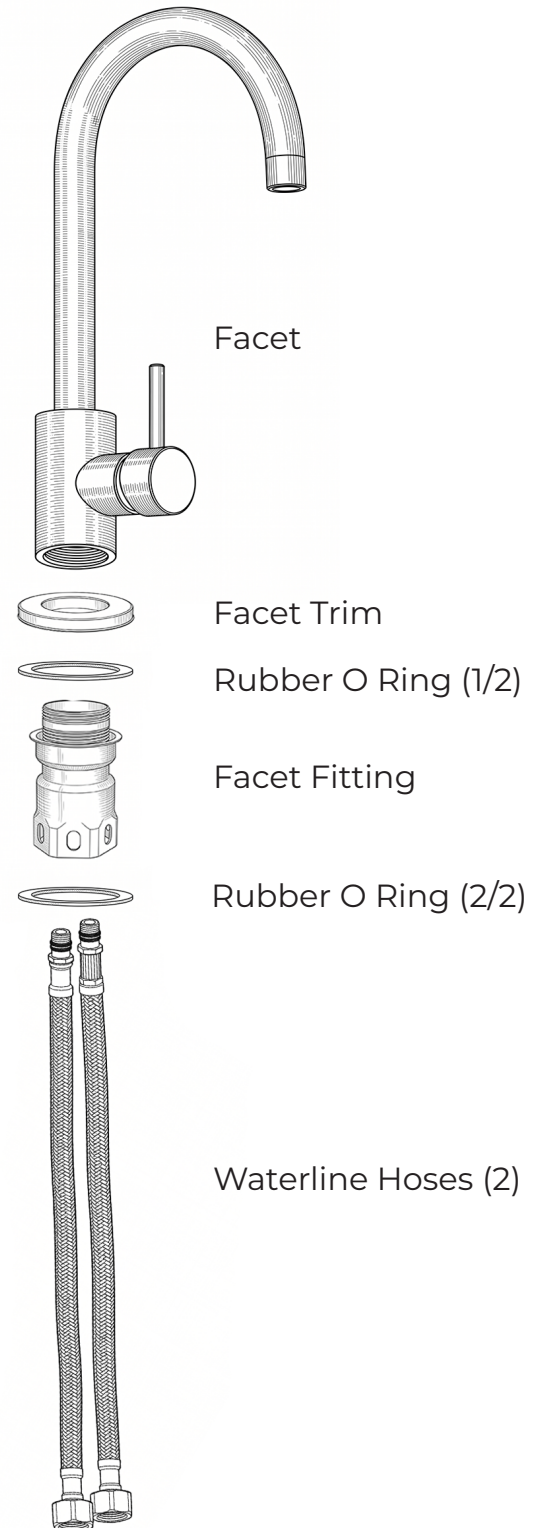

BASKET STRAINER ASSEMBLY

1. Verify all components , and make sure the surrounding area is clean & completely dry.
2. Roll a ring of plumber's putty about the same size as the sink's hole, and place it around the sink drain opening.
3. Insert the strainer into the drain hole, press it firmly into the putty, and wipe away any excess putty from above & below.
4. From underneath the sink, slide the foam washer onto the strainer stem. Then do the same with the rubber washer.
5. Thread and tighten the locknut onto the strainer stem. Hold the strainer still from above with pliers while tightening from underneath.
6. Place the tailpiece washer on top of the tailpiece, align it under the strainer stem, and hand-tighten firmly with a wrench; **DO NOT** over tighten.
7. Drop the strainer basket and lid into place inside the drain.
8. Have a qualified professional connect and seal your sink.

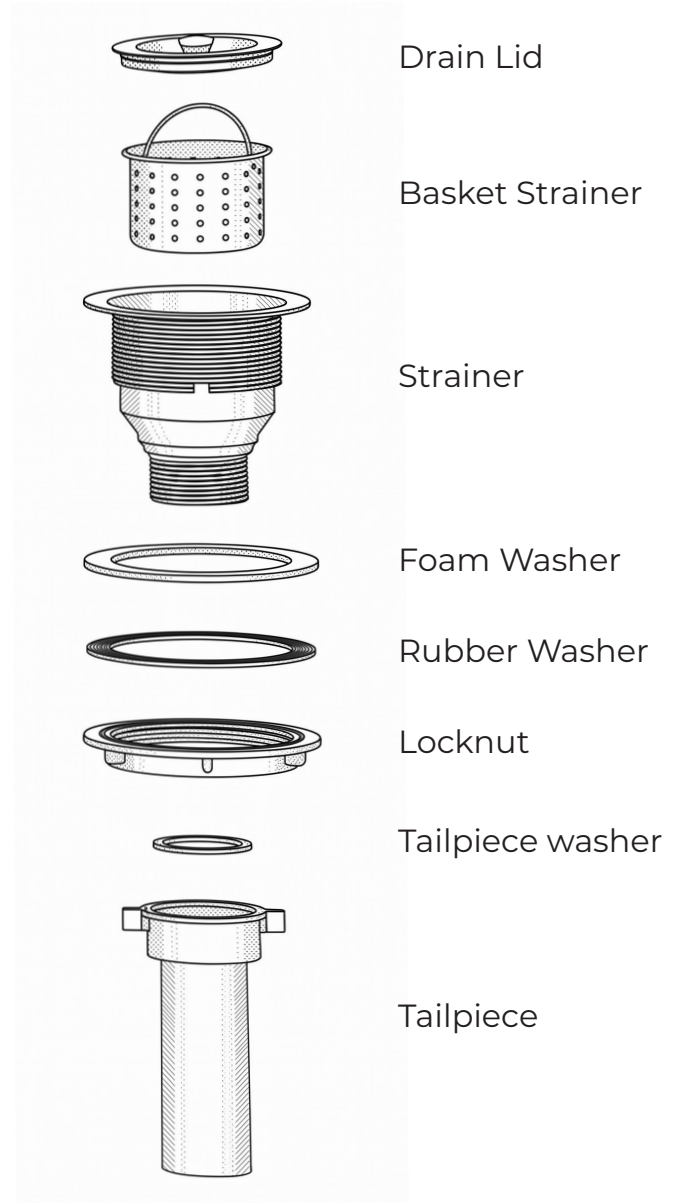

For additional assistance, questions or concerns please contact our support team at support@videlusa.com, or by calling (909) 460 -5579.